













a_s / DC	5 %	10 %	15 %	20 %	25 %	30 %	40 %	50 %	60 %	70 %	75 %	80 %	90 %	100 %
	1.48	1.35	1.27	1.22	1.19	1.16	1.11	1.08	1.05	1.03	1.00	1.00	1.00	1.00
	2.20	1.60	1.35	1.20	1.10	.95	.85	.75	.85	.95	1.00	1.00	1.00	1.00
	.64	.64	.64	.64	.64	.65	.65	.67	.68	.71	.72	.74	.79	1.00

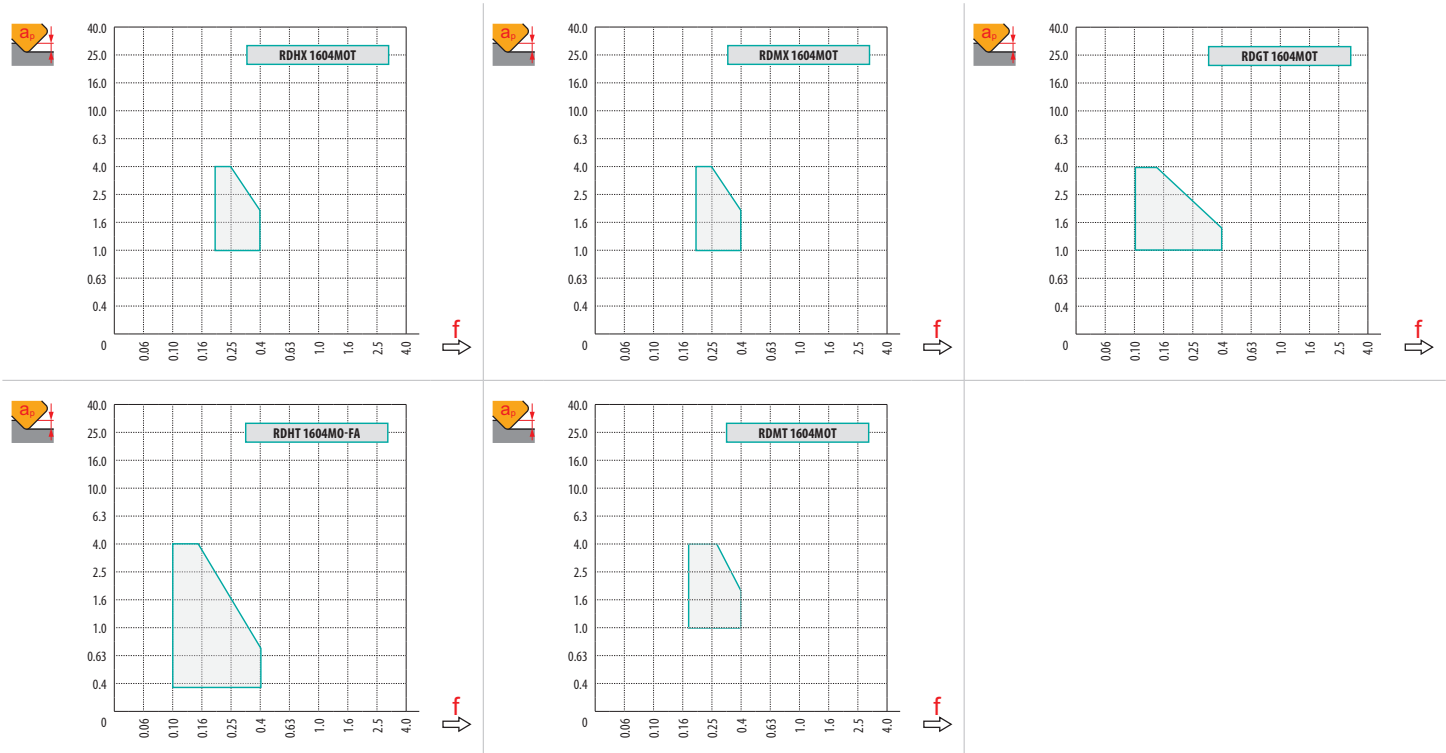


	RDHX 16	RDMX 16	RDGT 16	RDHT 16-FA
	8.0	8.0	8.0	8.0
	-	-	-	-



		(mm)															
		.00	.50	.75	1.00	1.25	1.50	2.00	2.50	3.00	3.50	4.00	5.00	6.00	7.00	8.00	
32		16.0	21.6	22.8	23.7	24.6	25.3	26.6	27.6	28.5	29.2	29.9	30.8	31.5	31.9	32.0	
52		36.0	41.6	42.8	43.7	44.6	45.3	46.6	47.6	48.5	49.2	49.9	50.8	51.5	51.9	52.0	
66		50.0	55.6	56.8	57.7	58.6	59.3	60.6	61.6	62.5	63.2	63.9	64.8	65.5	65.9	66.0	
80		64.0	69.6	70.8	71.7	72.6	73.3	74.6	75.6	76.5	77.2	77.9	78.8	79.5	79.9	80.0	
100		84.0	89.6	90.8	91.7	92.6	93.3	94.6	95.6	96.5	97.2	97.9	98.8	99.5	99.9	100.0	
		.00	.50	.75	1.00	1.25	1.50	2.00	2.50	3.00	3.50	4.00	5.00	6.00	7.00	8.00	
		-	.91	.74	.65	.58	.53	.46	.42	.38	.36	.34	.30	.28	.26	.25	









	RPMX	APMX/I
32	25°	4.0/19
52	8°	4.0/58
66	6°	4.0/78
80	4°	4.0/100
100	3°	4.0/100

	DMIN	DMAX		
32	34.0	64.0	4.0	4.0
52	74.0	104.0	4.0	4.0
66	102.0	132.0	4.0	4.0
80	130.0	160.0	4.0	4.0
100	170.0	200.0	4.0	4.0


4.0



		3	5	10	15	20	30	40	50	60	80	100
32		.620	.800	1.131	1.386	1.600	1.960	2.263	2.530	2.771	3.200	3.578
52		.790	1.020	1.442	1.766	2.040	2.498	2.884	3.225	3.533	4.079	4.561
66		.890	1.149	1.625	1.990	2.298	2.814	3.250	3.633	3.980	4.596	5.138
80		.980	1.265	1.789	2.191	2.530	3.098	3.578	4.000	4.382	5.060	5.657
100		1.095	1.414	2.000	2.449	2.828	3.464	4.000	4.472	4.899	5.657	6.325
		3	5	10	15	20	30	40	50	60	80	100
8.0		.438	.566	.800	.980	1.131	1.386	1.600	1.789	1.960	2.263	2.530